END
DATE
FILMED
2-78
DDC

NAVAL POSTGRADUATE SCHOOL
Monterey, California

DDC

RECEIVED

JAN 17 1978

B

THESIS

EXPERIMENTAL STUDY OF NATURAL CONVECTION IN
THIN HORIZONTAL LIQUID LAYERS

by

Mahmut Yurteri

September 1977

Thesis Advisor: M.D. Kelleher

Approved for public release; distribution unlimited.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Experimental Study of Natural Convection in Thin Horizontal Liquid Layers,		5. TYPE OF REPORT & PERIOD COVERED Engineer's Thesis; September 1977
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Mahmut Yurteri		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93940		12. REPORT DATE September 1977
		13. NUMBER OF PAGES 70
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Natural Convection
Heat Transfer
Thin Liquid Layers
Critical Rayleigh Number

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

Heat transfer through a very thin horizontal liquid layer bounded on top by a cooled glass plate and on bottom by a heated copper plate was measured. Results were correlated in terms of Nusselt number as a function of Rayleigh number. Three different liquids were used under conditions to give a range of Rayleigh number from 350 to 4100 and Prandtl number

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE
1 JAN 73
(Page 1) S/N 0102-014-6601 |

251450

(20. ABSTRACT Continued)

from 34 to 477.

Up to a critical condition heat is transferred by conduction alone. Convection appears when Ra = 1600 $\pm$ 100. A correlation for critical Rayleigh number as a function of Prandtl number was obtained.

+ a -

ACCESSION for

NTIS   White Section ☑
DDC   Buff Section ☐
UNANNOUNCED   ☐
JUSTIFICATION _____

BY _____
DISTRIBUTION/AVAILABILITY CODES
Dist.   AVAIL. and/or SPECIAL

A

Experimental Study of Natural Convection in
Thin Horizontal Liquid Layers

by

Mahmut Yurteri
Lieutenant, Turkish Navy

Submitted in partial fulfillment of the
requirements for the degrees of

MASTER OF SCIENCE IN MECHANICAL ENGINEERING

and

MECHANICAL ENGINEER

from the
NAVAL POSTGRADUATE SCHOOL
September 1977

Author _____

Approved by: _____
Thesis Advisor

_____
Chairman, Department of Mechanical Engineering

_____
Dean of Science and Engineering

3

ABSTRACT

Heat transfer through a very thin horizontal liquid layer bounded on top by a cooled glass plate and on bottom by a heated copper plate was measured. Results were correlated in terms of Nusselt number as a function of Rayleigh number. Three different liquids were used under conditions to give a range of Rayleigh number from 350 to 4100 and Prandtl number from 34 to 477.

Up to a critical condition heat is transferred by conduction alone. Convection appears when $Ra = 1600 \pm 100$. A correlation for critical Rayleigh number as a function of Prandtl number was obtained.

4

TABLE OF CONTENTS

LIST OF TABLES

LIST OF FIGURES

NOMENCLATURE

Symbol	Description	Units
A_B	Area covered by the heater	ft^2
A_{LIQ}	Test area bounded by the plexiglass shim	ft^2
A_P	Surface area of the plexiglass shim	ft^2
A_S	Surface area of the test chamber on the sides	ft^2
C_{CW}	Specific heat of the cooling water	Btu/lbm - °F
C_{LIQ}	Specific heat of the test liquid	Btu/lbm - °F
E_{GH}	Voltage across the guard heater	V
E_H	Voltage across the heater	V
E_R	Voltage across the calibrated resistance	V
F_{CW}	Cooling water flow rate	lbm/hr
g	Acceleration of gravity	ft/sec^2
$Gr = \dfrac{g\beta\Delta T L^3}{\nu^2}$	Grashof number	
k_{INS}	Thermal conductivity of the insulation material	Btu/hr-ft-°F
k_{LIQ}	Thermal conductivity of the test liquid	Btu/hr-ft-°F
k_P	Thermal conductivity of plexiglass	Btu/hr-ft-°F
L	Distance between the two plates of the test section	ft
L_B	Thickness of the insulation between the two groups of thermocouples between the insulation layers	ft

8

Symbol	Description	Units
L_S	Thickness of the insulation on sides of the apparatus	ft
$Nu = \dfrac{Q_T L}{kA\Delta T}$	Nusselt number	
$Pr = \dfrac{\nu}{\alpha}$	Prandtl number	
R	Resistance of the calibrated resistance	Ohms
$Ra = GrPr$	Rayleigh number	
Ra_{CR}	Critical value of the Rayleigh Number	
Q_B	Heat loss through the insulation layers below the heater	Btu/hr
Q_{CW}	Heat transferred into the cooling water chamber	Btu/hr
Q_{INS}	Total heat loss through the insulation	Btu/hr
Q_L	Heat leakage through the plexiglass shim	Btu/hr
Q_P	Heat supplied by the heater	Btu/hr
Q_S	Heat loss through the insulation on sides	Btu/hr
Q_T	Heat transferred into the test chamber	Btu/hr
T_C	Copper plate temperature	°F
T_{CW}	Cooling water temperature	°F
T_F	Film temperature of the test chamber	°F
T_G	Glass plate temperature	°F
T_{INS}	Temperature readings of the thermocouples in the insulation	°F
T_∞	Room temperature	°F

Symbol	Description	Units
$\alpha = \dfrac{k}{\rho C}$	Thermal diffusivity	ft^2/hr
β	Volume coefficient of expansion	$1/°F$
ΔT	Temperature difference between the average temperatures of the two plates of the test chamber	$°F$
ΔT_{CW}	Temperature difference between the inlet and exit temperatures of the cooling water	$°F$
ΔT_{INS}	Temperature difference between the average temperature readings of the two groups of thermocouples in the insulation	$°F$
ΔT_{∞}	Temperature difference between the film temperature of the test chamber and the room temperature	$°F$
ν	Kinematic viscosity of test liquid	ft^2/hr
ρ_{LIQ}	Density of test liquid	lbm/ft^3

10

ACKNOWLEDGMENTS

The author wishes to thank Professor Matthew D. Kelleher, his thesis advisor, for his guidance and advice in this study.

The author would also like to thank Mr. George Bixler, Mr. Kenneth Mothersell, Mr. Thomas Christian and Mr. Jim Selby for their assistance and work on the experimental apparatus.

A special word of thanks to my wife, Sara, for her understanding and patience during the entire study.

I. INTRODUCTION

A. BACKGROUND

The field of natural convection in enclosures encompasses many variations of geometry and input situations. One of these situations is heat flow in the narrow space between two horizontal parallel plates where the lower plate has a higher temperature than the upper plate. When the lower plate is heated, the fluid remains immobile and an unstable stratification is formed, inasmuch as the warmer fluid of lower density is located below the cooler fluid whose density is higher.

In his classical work on convection currents in a horizontal layer of fluid Rayleigh [Ref. 1] examined the case of temperature gradients in a layer of fluid. He formulated the flow equations for a discrete disturbance in the fluid and determined the conditions under which the disturbance would amplify causing the layer to become unstable. Rayleigh recognized that the unstable stratification must break down at a certain value of the temperature difference above which a convective motion must be generated. Below the critical value of Rayleigh number, defined as:

$$Ra = \frac{g \ \beta \ \Delta T \ L^3}{\alpha \ \nu}$$

pure conduction is observed. Above the critical value of the Rayleigh number convection begins.

Benard [Ref. 2] performed the first laboratory controlled experiments on thermally unstable liquid layers. He worked with liquid layers on the order of several millimeters, lying on a metallic plate which was heated and maintained at a uniform temperature. The upper surface of the liquid layer was free and at a lower temperature than at the plate surface, since it was in contact with the ambient air. Benard described the change from conduction to convection in two phases. The fluid remains at rest until the vertical temperature difference becomes sufficiently large. A pre-liminary motion of the fluid then results. Shortly thereafter, this first phase of relatively short duration appears, in which the fluid forms cells of nearly regular polygons with four to seven sides. This phase lasts from a few seconds to several minutes for more viscous fluids. During the second phase, the cells become equal and regular and align themselves. The limit of the second phase is thus a permanent regime of cells with vertical boundaries and hexagonal cross sections as shown in Figure 1. Liquid rises in the core of the cell, moves outward at the top, descends at the vertical boundary between adjacent cells and moves inward at the bottom.

In 1926 Jeffreys [Ref. 3] presented a solution to Rayleigh's problem for two boundaries with no tangential forces between boundary and fluid. His study included solutions for the case of two rigid conducting boundaries
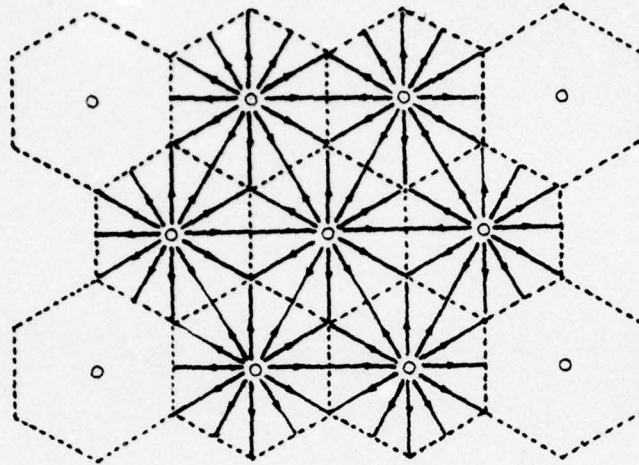
Plan View
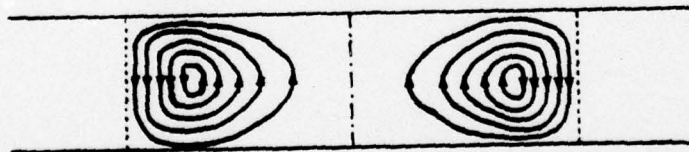
Vertical Section

FIGURE 1. Schematic Sketch of Benard Cell Structure

14

and a rigid conducting boundary at the base with a free
surface at the top. For two rigid conducting boundaries
he found the critical Rayleigh number to be about 1200.
By a revised solution method in 1928 [Ref. 4] Jeffreys
obtained 1709.5 for the critical Rayleigh number for two
rigid conducting boundaries.

Later Low [Ref. 5], Sutton [Ref. 6], Malkus [Ref. 7]
and Catton [Ref. 8] in their theoretical works agreed on
the critical Rayleigh number of 1705 ± 5.

Schmidt and Milverton [Ref. 9] with their admittedly
rough experiments with distilled water determined the
critical value of the Rayleigh number to be 1770. In 1938
Chandra [Ref. 10] observed a columnar motion well under the
critical Rayleigh number. His test fluid was air with fluid
layer thicknesses varying between 4 and 16 millimeters.
He concluded that for all fluid layer thicknesses below
10 mm. a type of motion other than cellular motion which
he called columnar motion occurs below the critical Rayleigh
number. Later in 1952 DeGraaf and Van Der Held [Ref. 11]
worked with horizontal and inclined air layers between
parallel plates. They found that in horizontal air layers
the air remains at rest until the Rayleigh number reaches
about 2000. When this value is exceeded, the cellular
motion sets in, first in the form of hexagonal prisms, but
with a tendency to change into rows of tetragonal prisms
when the Rayleigh number increases. In contrast with the
Benard cells in liquids, the air descends in the middle.

This was explained by the increase of the kinematic viscosity with increase in temperature for gases. At smaller fluid layer thicknesses of 5.5 and 6.9 mm. a columnar motion, first described by Chandra, was observed when the Rayleigh number exceeded 1400. For these thicknesses, cellular motion was observed for Rayleigh numbers above 1600. This low critical Rayleigh number for thinner air layers was explained by the authors as being due to the very great temperature gradients.

Sutton [Ref. 6] explained previous works in his 1950 paper. He showed that the criterion for the "columnar" mode involves only the ratio of the absolute temperatures of the upper and lower surfaces. He also derived an expression and verified the critical temperature difference at which the transition takes place from the "columnar" to "cellular" mode. He also showed that the "cellular" mode will occur if the depth of the test fluid exceeds a certain value, but that for the more shallow layers, the "columnar" mode will be generated initially, ultimately passing to the "cellular" mode for increased temperature difference.

Malkus [Ref. 7] performed a series of experiments with distilled water and acetone. The distance between the two parallel plates ranged from 0.05 inches to 8.0 inches during these experiments. His experimental critical Rayleigh number was found to be 1700 ± 80.

Ernst Schmidt and Silveston [Ref. 12] examined heat transfer through a horizontal liquid layer bounded on the top by a cold surface and on bottom by a heated surface. Five different liquids were used at different temperatures for a range in Prandtl numbers of from 3 to 4000. Test liquids were distilled water, ethylene glycol, heptane and two silicone oils. Layer depths ranged from 1.45 mm. to 13 mm. Optical observations were made on the patterns formed in the layer by convection. They concluded that up to a critical condition heat is transferred by conduction alone and convection appears at

$$Ra = 1700 \pm 3\%.$$

They observed three distinct convection regimes. The first occurred as convection sets in and appeared to be a honey-comb pattern in the layer. As the Rayleigh number increases, the pattern was found to change to a series of stripes where the heat transfer had laminar character. The third regime was observed at higher values of Rayleigh number with a tangled and disordered pattern which was the turbulent region. Results, including the data of Mull and Reiher [Ref. 13] were correlated by Nu as a function of Ra. The authors concluded that the data indicated four distinct modes of heat transfer. Above Ra = 10,000 they found that Rayleigh number is not the only correlating parameter, and the Prandtl number must be taken into account.

17

The correlations derived from the data were:

Creeping region: $Nu = 0.0012 (Ra)^{0.90}$

Laminar region: $Nu = 0.24 (Ra)^{0.25}$

Transition region: $Nu = 0.30(Gr)^{0.16}(Pr)^{0.21}$

$= 0.30(Ra)^{0.16}(Pr)^{0.05}$

Turbulent region: $Nu = 0.10(Gr)^{0.31}(Pr)^{0.36}$

$= 0.10(Ra)^{0.31}(Pr)^{0.05}$

The authors commented that the creeping convection begins about Ra = 1700 and the laminar region about Ra = 3000. Starting point of the transition region was to be determined by $Ra = 8000(Pr)^{0.2}$ whereas the starting point of the turbulent region was given by $Ra = 18,000(Pr)^{0.2}$

Heat transfer measurements in horizontal fluid layers seem to be generally lacking in the literature except for some extensive data on air obtained by Mull and Reiher [Ref. 13] and on liquids by Ernst Schmidt and Silveston [Ref. 12]. One of the objectives of this study was to obtain data for liquids near the critical Rayleigh number, which is the area least covered by the previous works.

B. THESIS OBJECTIVES

The objectives of this study were to investigate natural convection in thin horizontal liquid layers heated from below, in particular to investigate the change from the

conduction heat transfer regime to the convection heat transfer regime. It was intended to determine the critical Rayleigh number associated with the transition.

Another objective of the study was to determine correlations of the Nusselt number as a function of the Grashof and the Prandtl numbers.

To accomplish these objectives a series of experiments with several different fluids were conducted. An experimental apparatus was designed where the hypothetical system of a system fluid contained between two infinite, horizontal surfaces was closely approximated by containing the fluid between two parallel plates and using layer depths which were very small compared with the dimensions of the plates.

II. APPARATUS

A. DESIGN CONSIDERATIONS

The hypothetical system of a fluid contained between two infinite, horizontal, conducting surfaces was closely approximated by containing the test liquid between parallel square plates and using layer depths which were very small compared with the dimensions of the plates. Larger layer depths were avoided to keep the edge effects to a minimum.

Several preliminary experiments were performed with distilled water to obtain an appreciation for the general performance of the apparatus. These preliminary experiments gave a general idea of the required properties of the test liquid and the required distance between the two plates in order to obtain Rayleigh numbers about the critical value of the Rayleigh number. The data obtained from these preliminary experiments are not included in this study because the obtained Rayleigh numbers were outside the range of interest.

A petroleum based oil, commercially known as Mobil 603 was chosen as the second test liquid after these preliminary experiments. Two sets of data were obtained with Mobil 603. A plain glass plate was used as the top surface of the test chamber during the first set of experiments. During these experiments a problem with short circuiting of the heater with the copper plate was encountered at high

temperatures. After these experiments a very thin, heat
resistant gasket was put between the copper plate and the
electric heater to increase the electrical insulation.
During the second set of experiments a glass plate coated
with a transparent, electrically conductive coating was
used. The data obtained from these two sets of experiments
are contained in the study. The data of the second set of
experiments was consistent with the data obtained later and
this data is used for correlations.

With the help of the preliminary water data a charac-
teristic plate spacing L, was selected to obtain a Rayleigh
number close to the critical Rayleigh number. Rayleigh
numbers above and below the critical value were obtained
by changing other parameters such as the temperature
difference between the two plates of the test chamber and
the fluid properties.

B. DESCRIPTION OF THE APPARATUS

The test apparatus as shown schematically in Figure 2,
consisted of three principal components. These were a test
chamber where the test liquid was contained between two
parallel plates, a cooling chamber above it where cooling
water circulated and a guard heater/insulation assembly.

A copper plate with an attached heater at the bottom
and a glass plate at the top with a plexiglass shim between
constituted the test chamber. The cooling chamber consisted
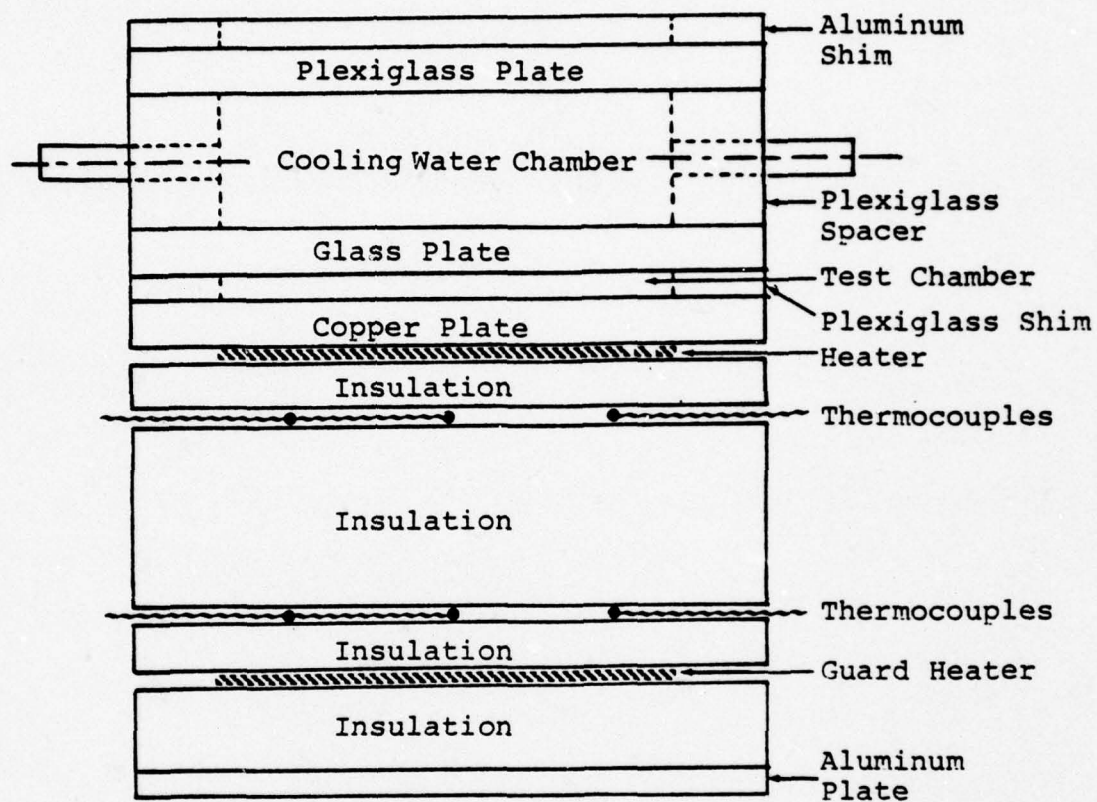of a plexiglass plate on top, the glass plate of the test

FIGURE 2. Cross Section of the Test Apparatus

chamber on bottom and a thick plexiglass spacer with inlet and outlet tubes on the sides. Layers of insulation with six thermocouples in two groups and a guard heater between the insulation layers constituted the insulation piece. The guard heater and the thermocouples were placed in the insulation to minimize the heat loss.

A one-quarter inch thick and seven inch square copper plate, as shown in Figure 3, was used as the lower heated surface of the test chamber. Both sides were given a machine finish and later the upper surface was polished to a mirror finish. Flattened beads of five thermocouples (30 gage copper-constantan) were attached on this surface. The thermocouples were painted with a nonconducting paint to avoid shortcircuiting through the copper plate. The thermocouple leads were taken out through 0.05 inch diameter holes bored into the copper plate. These two holes were sealed with silicon rubber.

A third channel was bored into the copper plate and a small diameter stainless steel tube was soldered to the outer end of it. A plastic tube connected this metal tube to a container filled with test liquid which acted as an expansion tank for the test chamber. It also kept the test chamber near atmospheric pressure.

The heater element was made of twelve feet of nichrome wire having a total resistance of twelve ohms. The twelve foot long wire was shaped into parallel strips, one-quarter inch apart covering an area six inches square as shown in
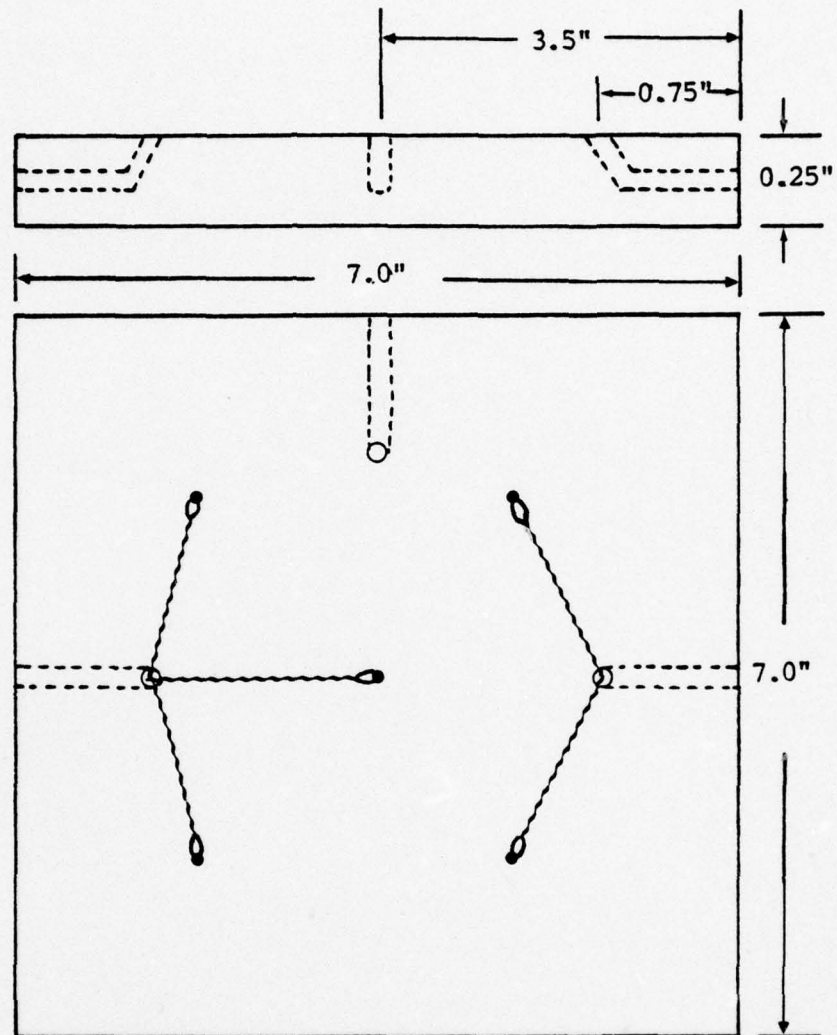
FIGURE 3.   Location of the Thermocouples on the
Copper Plate

Figure 4. The shape of the heater element and the thickness
of the copper plate insured a uniform heat flux. The heater
element was attached to the bottom of the copper plate with
epoxy. To avoid shortcircuiting through the copper plate,
the heater element and the bottom of the copper plate were
painted with a high temperature nonconducting paint. To
insure electric insulation, a 0.010 inch heat resistant
gasket was placed between the heater and the copper plate.

A one-quarter inch thick and seven inch square glass
plate was used to cool the test liquid from the top. Five
thermocouples with flattened beads were attached on the
lower surface of the glass plate as shown in Figure 5.

A one half inch wide plexiglass shim with a thickness
of 0.125 inch was used as the spacer between the glass and
the copper plate. The thermocouple leads from the glass
plate were taken out through holes drilled into the plexi-
glass shim as shown in Figure 6.

The cooling chamber for the upper plate consisted of
a half inch wide, one inch thick spacer with water inlet
and outlet tubes on two sides as shown in Figure 7. Cooling
water flowed through this space, bounded on bottom by the
glass cooling plate and on top by a one-quarter inch thick
and seven inch square plexiglass plate. To insure a
watertight seal, two 0.0625 inch Neoprene rubber "O" rings
were installed at each spacer-plate interface.

To insure that the heat generated by the heater would
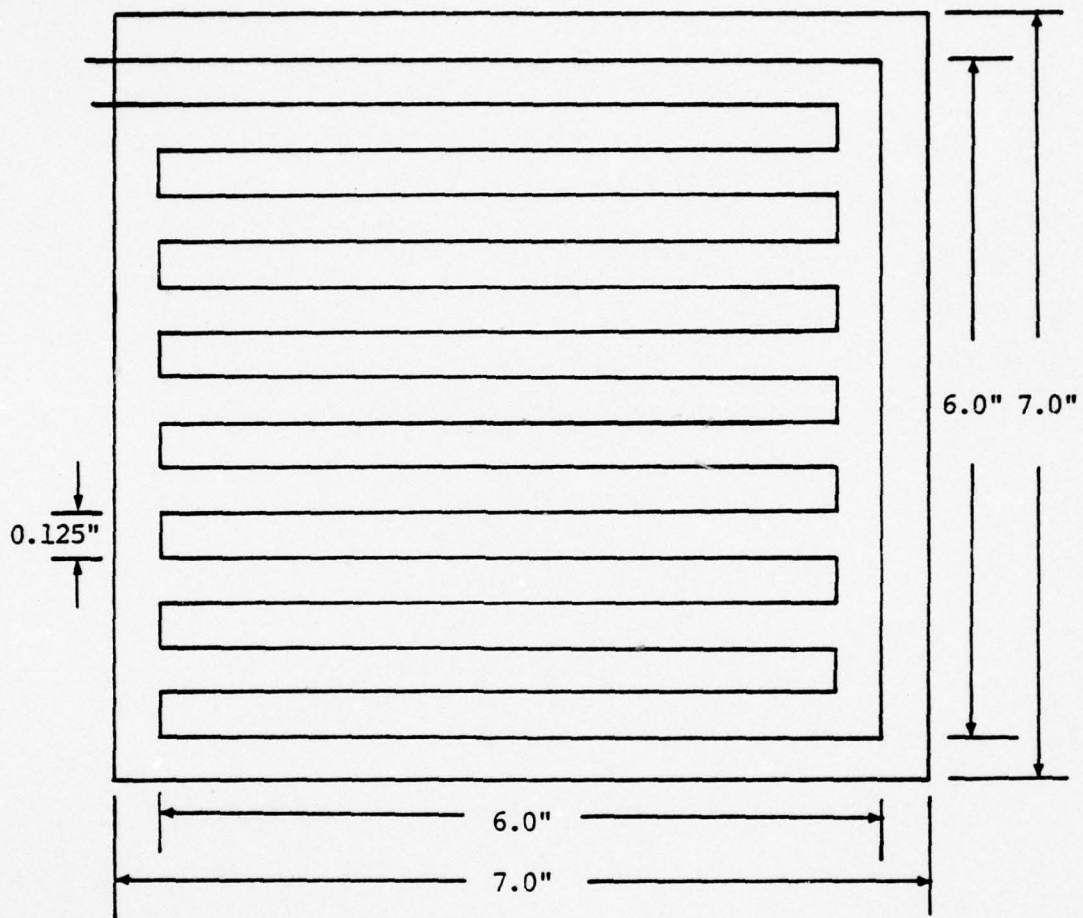go into the copper plate, a guard heater and two inches of
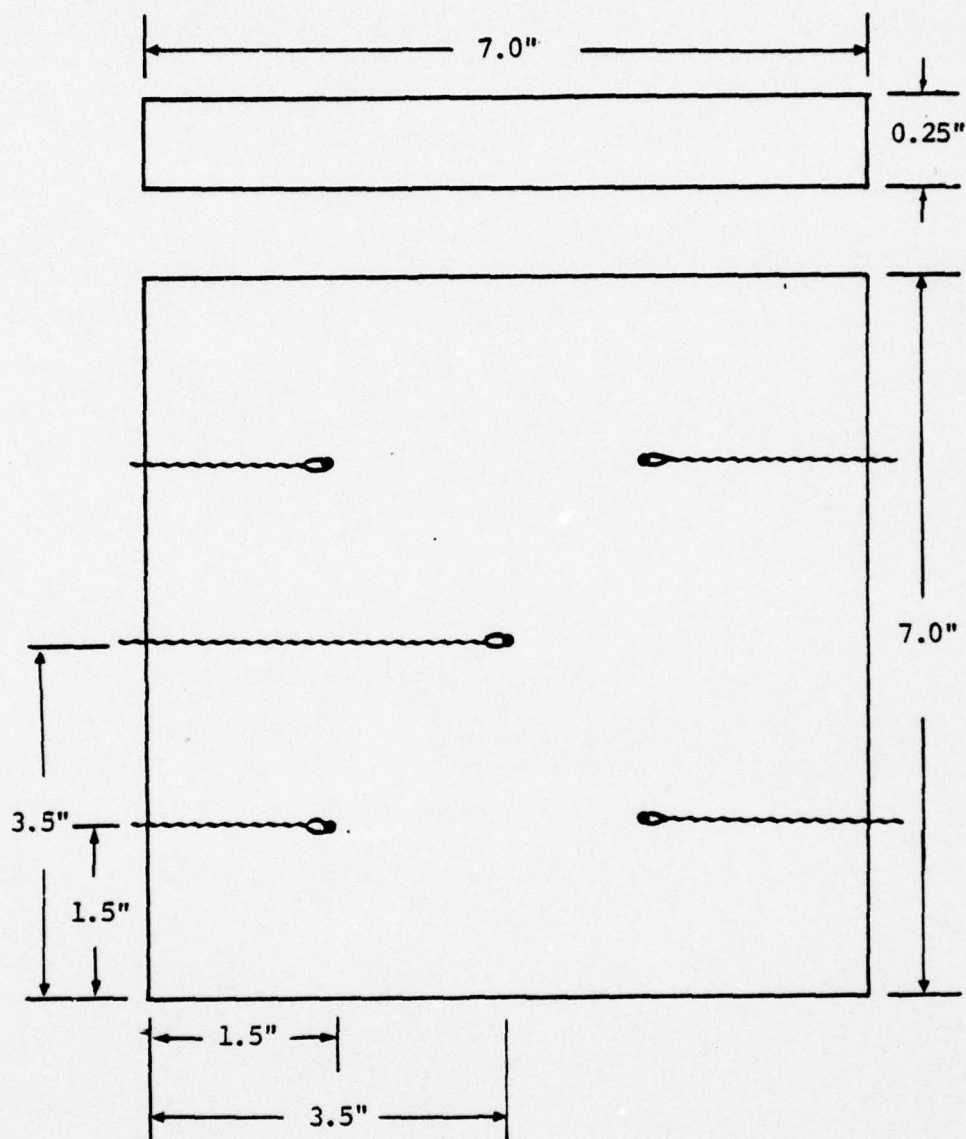
25

FIGURE 4. Heater Element

FIGURE 5. Location of the Thermocouples on the
Glass Plate
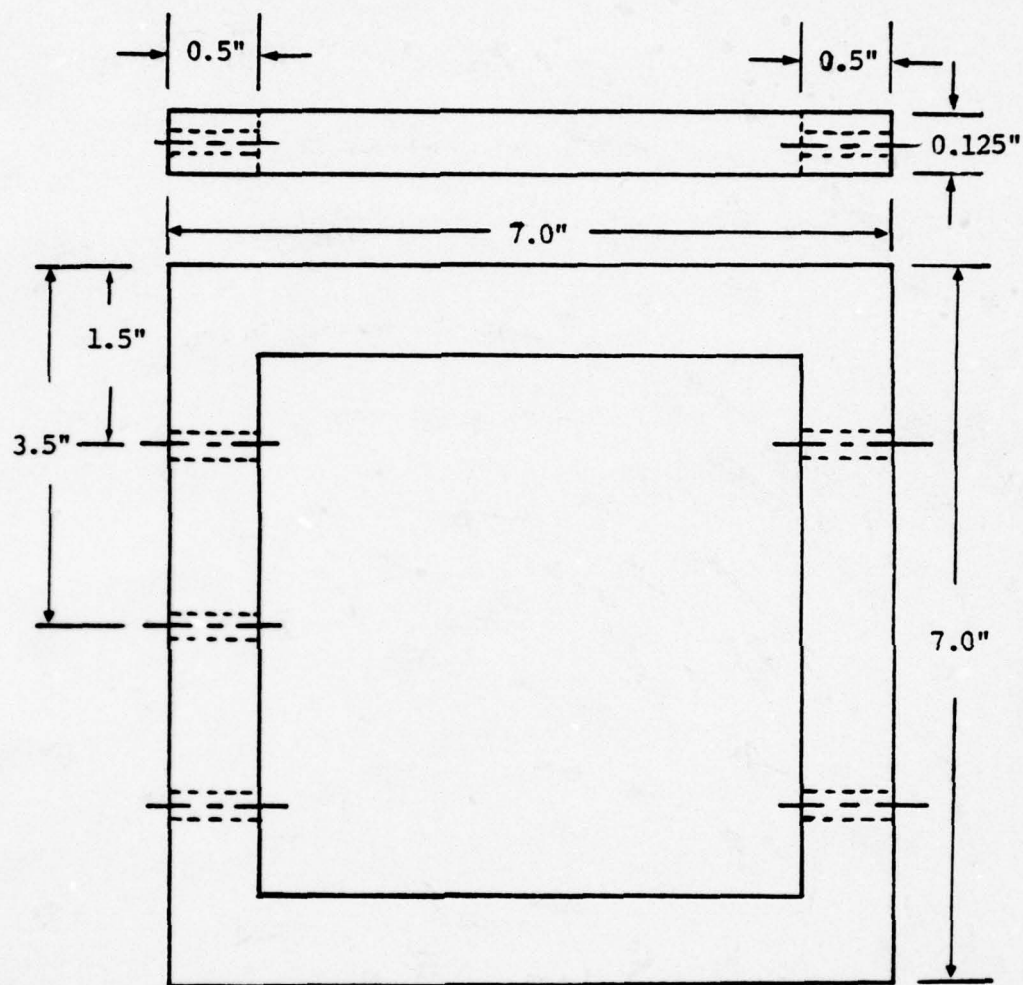
FIGURE 6. Plexiglass Shim
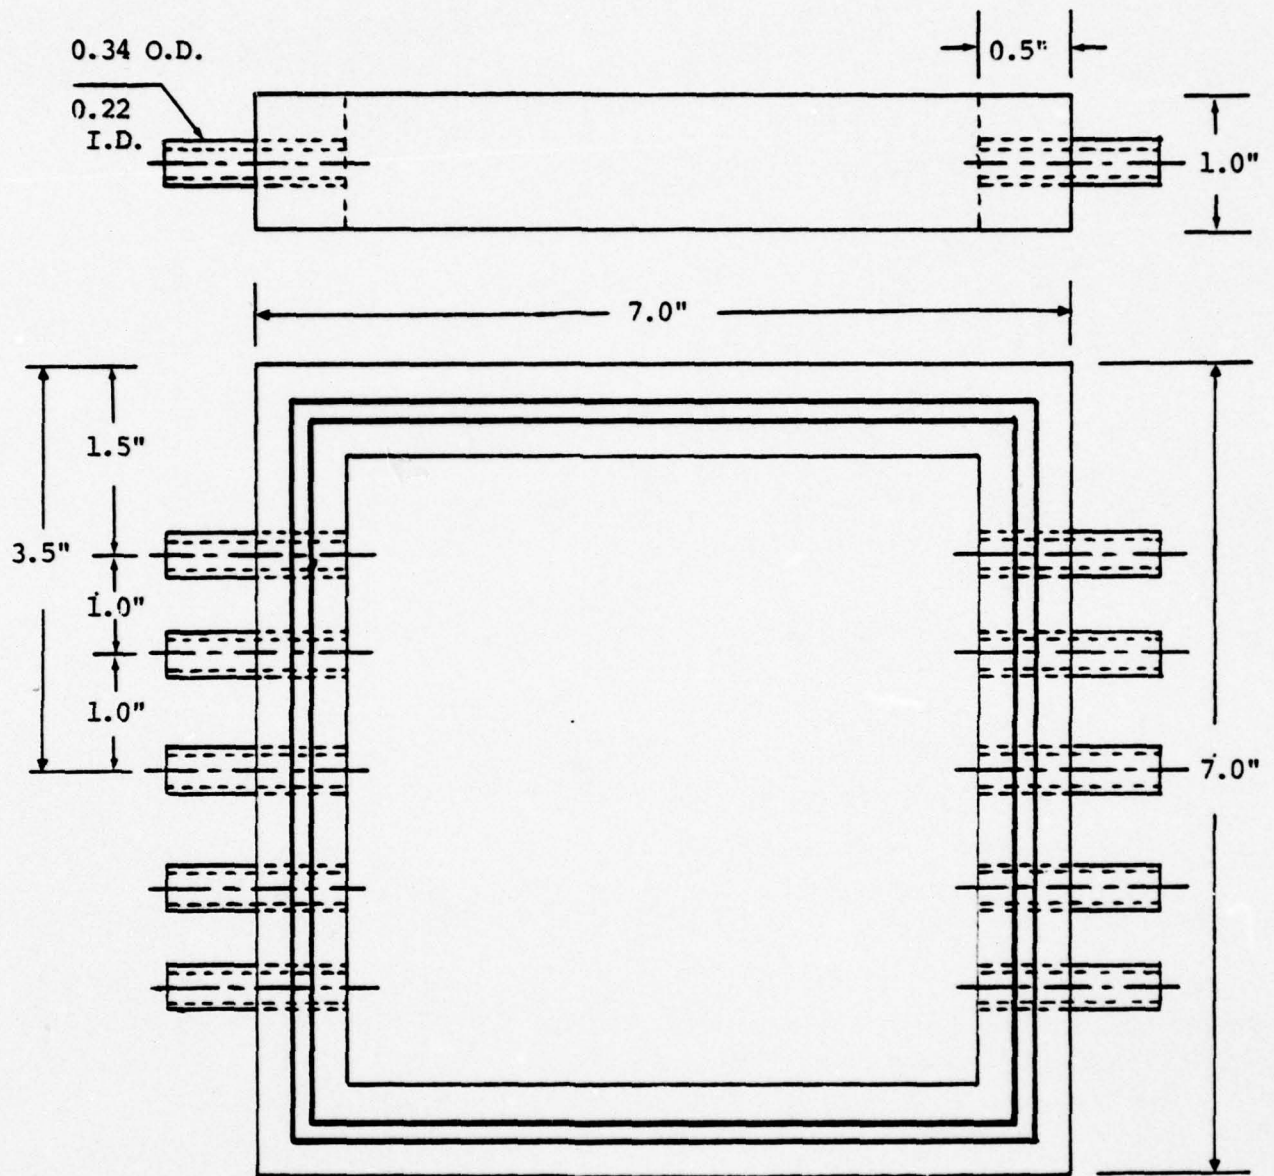
FIGURE 7. Spacer of the Cooling Water Chamber

insulation was placed below the copper plate. The guard heater was constructed from nichrome wire in the same manner as the main heater element. Six thermocouples were installed in the insulation in two groups as shown in Figures 1 and 8. Power to the guard heater was adjusted so that the average temperature readings of the two groups were the same. Then the net heat loss through the insulation below the heating plate would be zero. This guard heater/insulation assembly was supported from the bottom with a one-quarter inch thick and seven inch square aluminum plate.

The plates and the insulation were clamped together using four sections of aluminum "U" channel and four connecting rods as shown in Figure 9. A leveling screw was attached to the bottom of each rod. By using the "U" channels to clamp the system together the load was distributed uniformly. A one-quarter inch thick, half inch wide aluminum shim was placed on top of the plexiglass plate to distribute the loading to a larger area. A torque wrench was used to insure the same and desired amount of load was applied on each rod.

C. INSTRUMENTATION

1. Temperature Measurement

The temperature distribution on the copper and glass plates was determined by five ungrounded junction, copper-constantan thermocouples on each plate. These ten thermocouples were wired into a thermocouple switching box, and
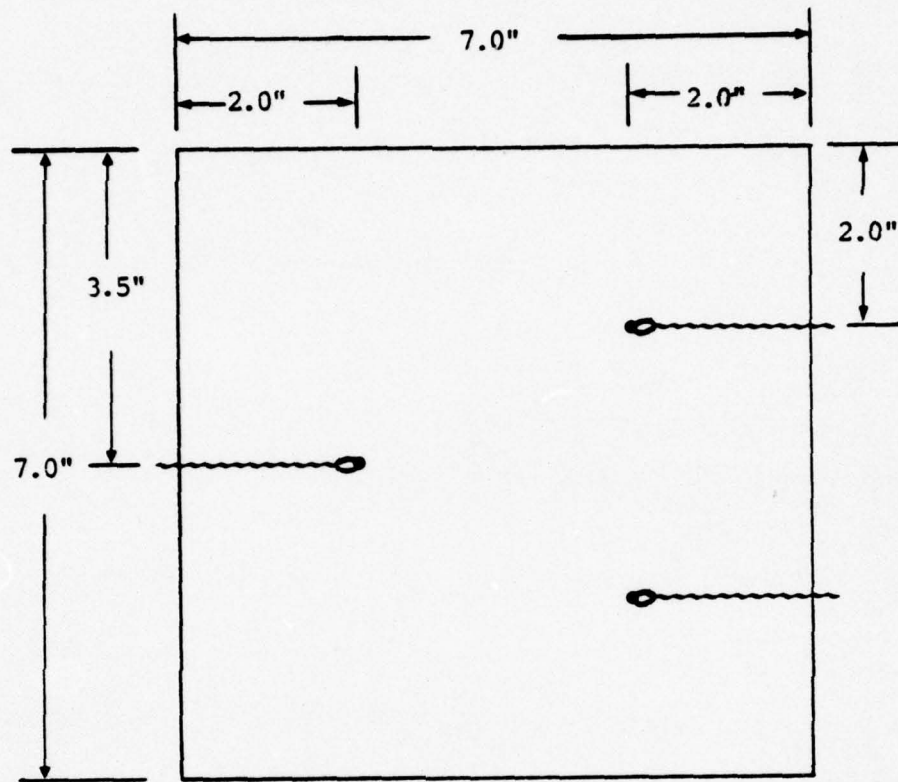
FIGURE 8. Location of Thermocouples in the Insulation
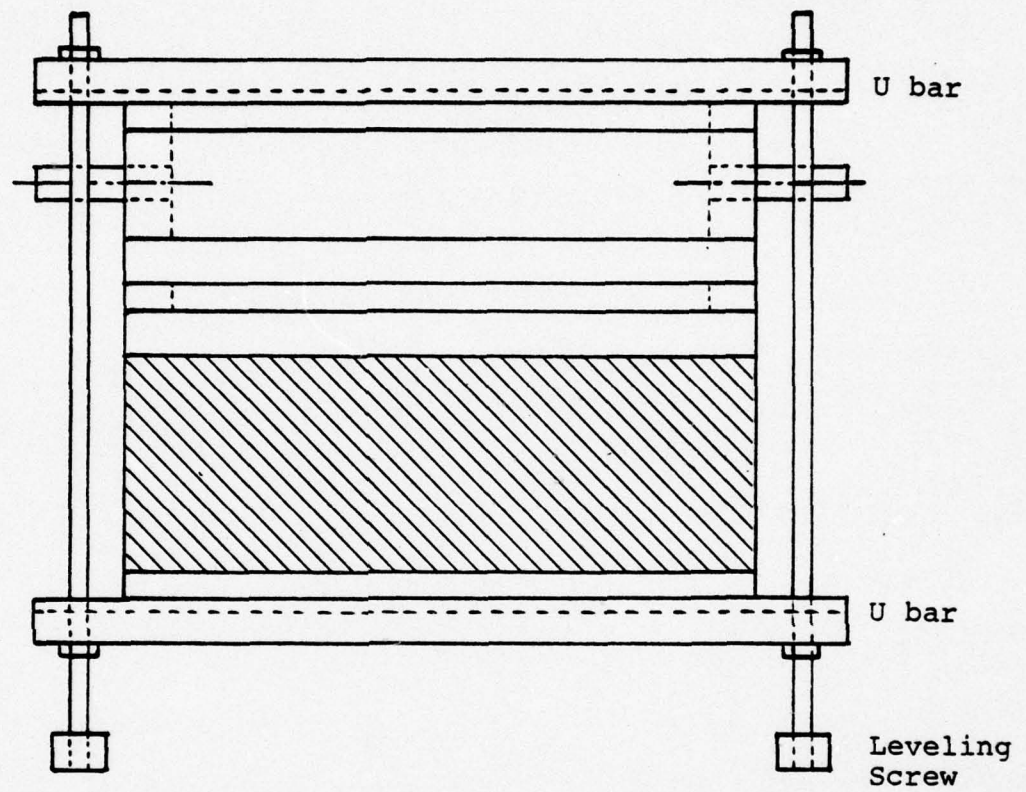
FIGURE 9.   Location of the "U" Bars

recorded separately by using a digital readout Numatron
which displays the temperature reading in °F directly.

A thermocouple was attached to the inlet of the
cooling water intake manifold and a second one to the outlet
of the discharge manifold. To check these two temperature
readings, an uncalibrated thermocouple was attached to every
water inlet and outlet tube of the cooling chamber. These
ten thermocouples were wired in parallel in two groups and
each group was then wired into the switching box. These
groups of five thermocouples in parallel gave average inlet
and exit temperature readings of the cooling water.

To control the heat loss through the insulation
below the heater element, two groups of thermocouples were
placed in the insulation. Each group contained three
thermocouples and these six thermcouples were wired into
the switching box separately. As mentioned before these
thermocouples were used together with the guard heater to
insure that the heat generated by the heater element was
transferred into the test chamber through the copper plate.

Thermocouple calibration procedure is given in
Appendix A.

2. Power to Heater Elements

A Lambda regulated DC power supply was used to
provide input voltage to the heater. A calibrated resistor
was placed in series with the power supply and the heater.
With this arrangement, voltage readings across the calibrated
resistor and across the heater were taken. Knowing the

33

voltage of the calibrated resistance, the current through the circuit could be determined. The product of this current and the voltage across the heater gave the input power. By this arrangement the value of the input power could be accurately reset for different experiments. The voltage across the heater and across the calibrated resistance were determined using a Keithley 168 Autoranging DMM digital voltmeter. A sample calculation is provided in Appendix B.

A variac was used to provide input voltage to the guard heater. The voltage across the guard heater was determined using the same digital voltmeter.

To ensure constant voltage supply, the input power for all electric equipment was taken from the output of an AC voltage regulator.

3. Water Flow Rate into the Cooling Chamber

A submersible electric pump was used to pump the cooling water from a 25 gallon reservoir. The flow rate was adjusted by controlling the voltage to the pump with a variac. A Fischer and Porter Co. flowmeter with a maximum rate of 0.6 GPM was used to determine the flow rate. The percentage of the maximum flow rate was marked on the flowmeter.

A general arrangement of apparatus with the instrumentation is shown in the photograph in Figure 10.
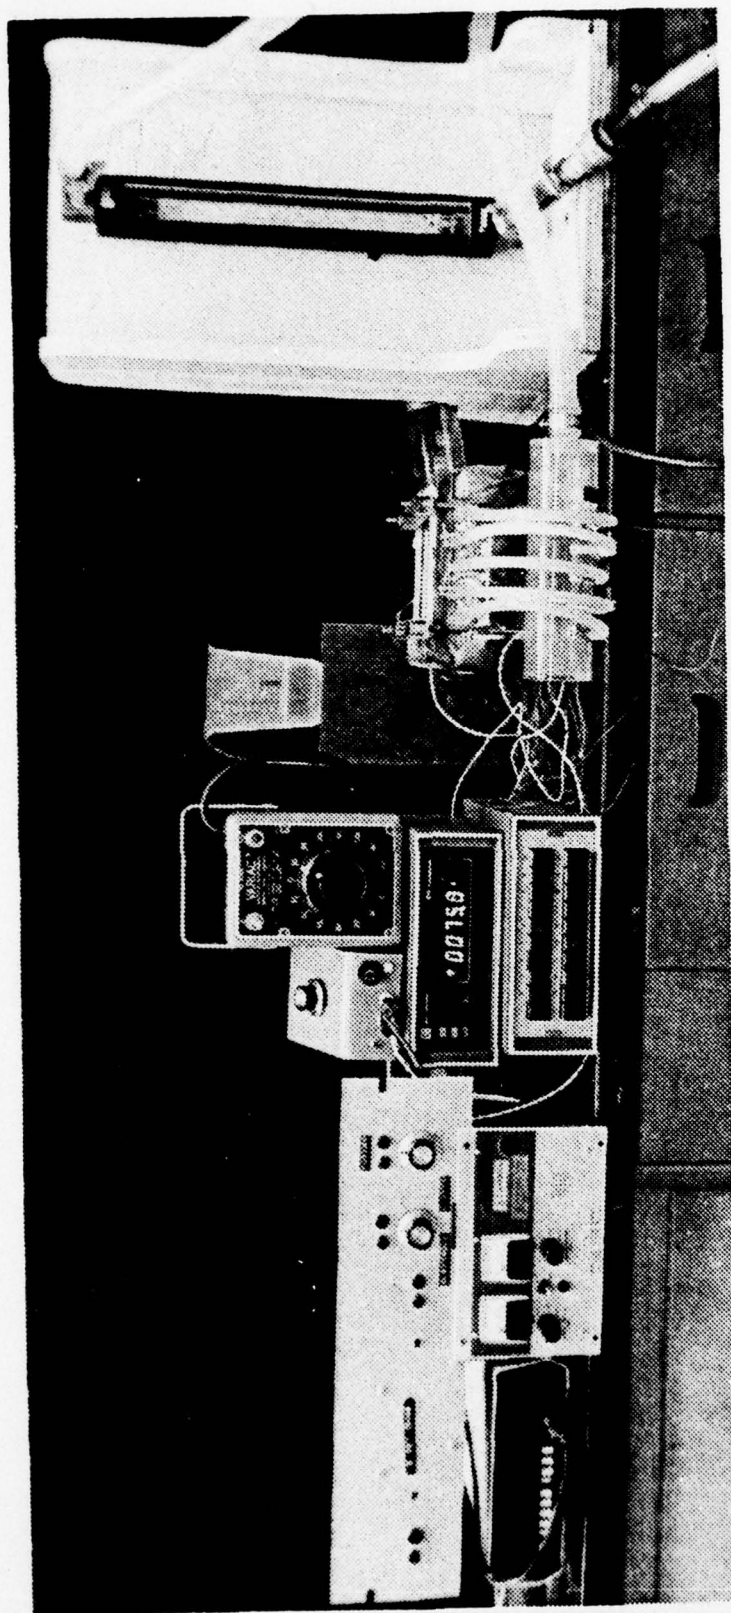
FIGURE 10. Apparatus with the Instrumentation

III. <u>PROCEDURE</u>

A. APPARATUS ASSEMBLY

The calibrated thermocouples were attached to the
plates as shown in Figures 2 and 4. The plexiglass shim
was placed on the glass plate and a watertight interface
was accomplished by means of silicon rubber. A thick
continuous silicon rubber film was laid on the upper sur-
face of the plexiglass shim. The apparatus was then filled
with the test liquid up to the edge of the silicon rubber
layer. The next step was to attach the overflow tube which
connected the test chamber to the expansion tank and to
fill the whole tube with the test liquid. The copper plate
was then placed over the glass plate and lightly pressed
down. Once the excess liquid and silicon rubber flowed
out, the test chamber was filled with the test liquid and
all air bubbles were eliminated. Generally this result was
accomplished by the third try.

Assembly of the whole apparatus had to be accomplished
quickly in order to avoid hardening of the silicon rubber
film between the plates. Once the silicon rubber had
hardened, a uniform thickness between plates could never
be attained.

Starting from the bottom, first the aluminum support
plate was placed on the two bottom "U" bars. The insulation
with the guard heater and thermocouples was placed on the

support plate. The test chamber and the cooling water
chamber were then placed on the insulation. The whole
apparatus is shown in Figure 1. A torque wrench was used
to compress the sections between the "U" bars. Starting
with low torque values and increasing the load a foot-
pound at a time an even load distribution and even silicon
rubber thickness between the plates was insured. After
measuring the distance between the copper plate and the
glass plate at each corner with an inside micrometer, the
test section was insulated on the sides. Later the apparatus
was levelled using the leveling screws and a small bubble
level on top of the apparatus.

B. PROCEDURE

   1. Measurements

      Data of a usual run consisted of readings of the
twenty thermocouples, voltages across the calibrated resistor
and the heater elements and the cooling water flow rate.
A complete experimental run usually lasted about three hours.
A set of data was recorded every half hour. Steady state
was considered established and final readings were made when
the temperatures in the whole system varied less than 0.2 °F
over half an hour.

      The recorded temperature data consisted of the
inlet and exit temperatures of the cooling water, the temper-
atures of the glass and the copper plates in the test chamber
and the temperatures in the insulation below the test chamber.

Power to the heater element was monitored by the voltage across the heater. The voltage across the heater element was increased by two volts at a time starting at 10 volts, to a maximum of 25 volts. In the vicinity of the critical Rayleigh number the voltage was increased by smaller steps to obtain data at desired points.

2. Determination of Dimensionless Numbers

The data recorded at steady state included ten temperature readings for the copper and the glass plates of the test chamber. The average of the five temperature readings for each plate, gave the average temperature of the corresponding plate. The difference between the average temperatures of the two plates was defined as ΔT. A sample calculation is contained in Appendix B.

All liquid properties were evaluated at the film temperature defined as

$$T_F = \frac{T_C + T_G}{2}$$

The Rayleigh number was calculated using the distance between the two plates of the test section as the characteristic length. The Rayleigh number also can be written as the product of the Grashof number:

$$Gr = \frac{g \ \beta \ \Delta T \ L^3}{\nu^2}$$

38

and the Prandtl number:

$$Pr = \frac{\nu}{\alpha} \ .$$

Voltages across the heater and the calibrated resistor were recorded for each run. Knowing the voltage across the calibrated resistance, the current through the heater circuit could be determined. The product of this current and the voltage across the heater gave the input power as shown in Appendix B.

Heat leakage through the plexiglass shim between the two plates and heat leakage through the insulation below and on the sides of the test chamber were determined. The difference between the input power and the heat leakages gave the actual heat transferred to the test liquid which was defined as Q_T and a sample calculation is contained in Appendix B.

The Nusselt number was then calculated. By definition the Nusselt number is:

$$Nu = \frac{Q_T \ L}{A_{LIQ} \ \Delta T \ k_{LIQ}}$$

Thermocouples located at the inlet and the exit manifolds of the cooling chamber gave the temperature rise of the cooling water in the cooling chamber. Together with the flow rate, this temperature difference, defined as

39

ΔT_{CW}, gave a check on the calculated heat transfer into the test chamber. A sample calculation is contained in Appendix B.

C. TEST LIQUIDS

A general idea of the required properties of the test liquid for the present design was obtained from the preliminary experiments conducted with distilled water.

Finding the desired properties of the test liquids was one of the major difficulties encountered during this study. All desired properties of a selected liquid were not contained in one reference. In some cases the properties were given for a temperature range which did not include the temperatures encountered in the experiments.

Three liquids were used. Prandtl numbers varied from 34 to 476 for the temperature range of the experiments. Properties of these liquids permitted temperature differences in the range of 4 °F to 33 °F with very small layer depths.

The first test liquid was a petroleum based oil commercailly known as Mobiltherm light 603. Properties were obtained from a technical bulletin [Ref. 14] published by the Mobil Research and Development Corporation.

The second test liquid was ethylene glycol. Properties were obtained from the Handbook of Heat Transfer Media [Ref. 15] and Thermophysical Properties of Matter [Ref. 16].

The third test liquid was a glycerol-water solution. Composition of the solution was 56% glycerol and 44% distilled water by weight. Properties of the liquid were obtained from Glycerol [Ref. 17].

IV. DISCUSSION AND CONCLUSIONS

The hypothetical system of a fluid contained between two infinite, horizontal, conducting surfaces was closely approximated by containing the very thin liquid layer between two parallel square plates. Heat transfer through this very thin liquid layer bounded on top by a cooled glass plate and on bottom by a heated copper plate was measured. Experiments were conducted for a range of Rayleigh numbers from 350 to 4100 with three different liquids. The Prandtl numbers varied from 34 to 477 under these conditions. A summary of the data obtained from these experiments is presented in Tables I to IV.

Table I contains the results of the experiments with Mobil 603. A plain glass plate was used as the cooled top surface. At high temperatures a short circuit between the heater and the copper plate was observed during these experiments. Later a very thin heat resistant gasket was placed between the heater and the copper plate. Data of these experiments is not used in obtaining the correlations.

Table II contains results of experiments with Mobil 603. During this second set of experiments a glass plate with its surface facing the copper plate coated with an electrically conducting transparent coating was used as the cooled top surface.

42

TABLE I

SUMMARY OF RESULTS FOR MOBIL 603 WITH PLAIN GLASS

T_F °F	ΔT °F	Ra	LnRa	Nu	LnNu	Pr
78.6	9.0	399	5.99	1.089	0.086	476.5
80.0	9.8	443	6.09	1.089	0.085	448.5
82.2	11.7	577	6.36	1.049	0.048	431.2
84.3	13.7	714	6.57	1.033	0.036	411.5
90.0	18.7	1129	7.03	0.978	-0.023	361.2
95.3	24.1	1158	7.41	0.978	-0.022	318.3
99.2	25.9	1179	7.48	0.974	-0.026	293.7
101.6	26.5	1943	7.57	1.005	0.005	279.0
101.1	28.1	2034	7.62	1.076	0.073	281.9
103.4	29.8	2272	7.73	1.187	0.172	268.5
108.7	30.9	2649	7.88	1.355	0.304	242.0
113.6	33.6	3201	8.07	1.567	0.449	220.2

43

TABLE II

SUMMARY OF RESULTS FOR MOBIL 603 WITH COATED GLASS

T_F °F	ΔT °F	Ra	LnRa	Nu	LnNu	Pr
88.5	15.6	933	6.84	0.946	-0.055	374.0
92.4	19.0	1260	7.14	0.977	-0.023	341.4
95.8	22.0	1585	7.37	0.937	-0.065	316.1
97.4	23.5	1758	7.47	1.003	0.003	304.7
101.2	26.4	2167	7.68	1.186	0.171	281.2
106.2	29.5	2707	7.90	1.413	0.345	253.7
110.7	32.2	3184	8.07	1.599	0.469	232.5

44

Tables III and IV present results of experiments with
ethylene glycol and 56 wt % glycerol-water solution respec-
tively. A plain glass plate was used during both of these
experiments as the cooled upper surface.

The data under the LnRa and LnNu columns are plotted
in Figure 13 as LnNu vs LnRa. The Nusselt number is about
1 from a Rayleigh number of 350 to a range of Rayleigh
numbers from 1500 to 1700, depending on the test liquid.
Ra = 1600 ± 100 was defined as the critical Rayleigh number.
In their earlier experimental works Schmidt and Reiher
[Ref. 9] and Ernst Schmidt and Silveston [Ref. 12] deter-
mined critical Rayleigh numbers from 1600 to 1800 for
various fluids. Up to this critical condition heat is
transferred by conduction only. The deviation of Nusselt
number in the conduction regime increases for lower tem-
perature differences where the uncertainty is higher.

At the Rayleigh numbers between 1500 and 1700 convection
appears and the Nusselt number increases with the increasing
Rayleigh number. The Nusselt number is nearly proportional
to the Rayleigh numbers up to Rayleigh number of about 3000.
A similar relationship was observed by Schmidt and Silveston
[Ref. 12] for the same region which they called as the
"creeping convection" region. The authors obtained a
correlation for the data in this region as:

$$Nu = 0.0012 \, (Ra)^{0.90}$$

TABLE III

SUMMARY OF RESULTS FOR ETHYLENE GLYCOL WITH PLAIN GLASS

T_F °F	ΔT °F	Ra	LnRa	Nu	LnNu	Pr
78.0	5.1	398	5.99	1.155	0.144	160.0
80.9	7.2	602	6.40	1.124	0.117	150.6
85.7	9.9	854	6.75	1.082	0.079	136.6
89.2	12.9	1281	7.16	1.070	0.068	127.1
90.3	14.3	1448	7.28	1.087	0.084	124.5
93.3	15.3	1647	7.41	1.166	0.154	117.3
95.8	17.6	1994	7.60	1.320	0.278	113.3
100.5	19.4	2420	7.79	1.440	0.364	101.2
107.2	21.8	3101	8.04	1.727	0.546	89.8
111.5	21.2	3860	8.26	1.804	0.590	82.7

TABLE IV

SUMMARY OF RESULTS FOR GLYCEROL-WATER SOLUTION WITH PLAIN GLASS

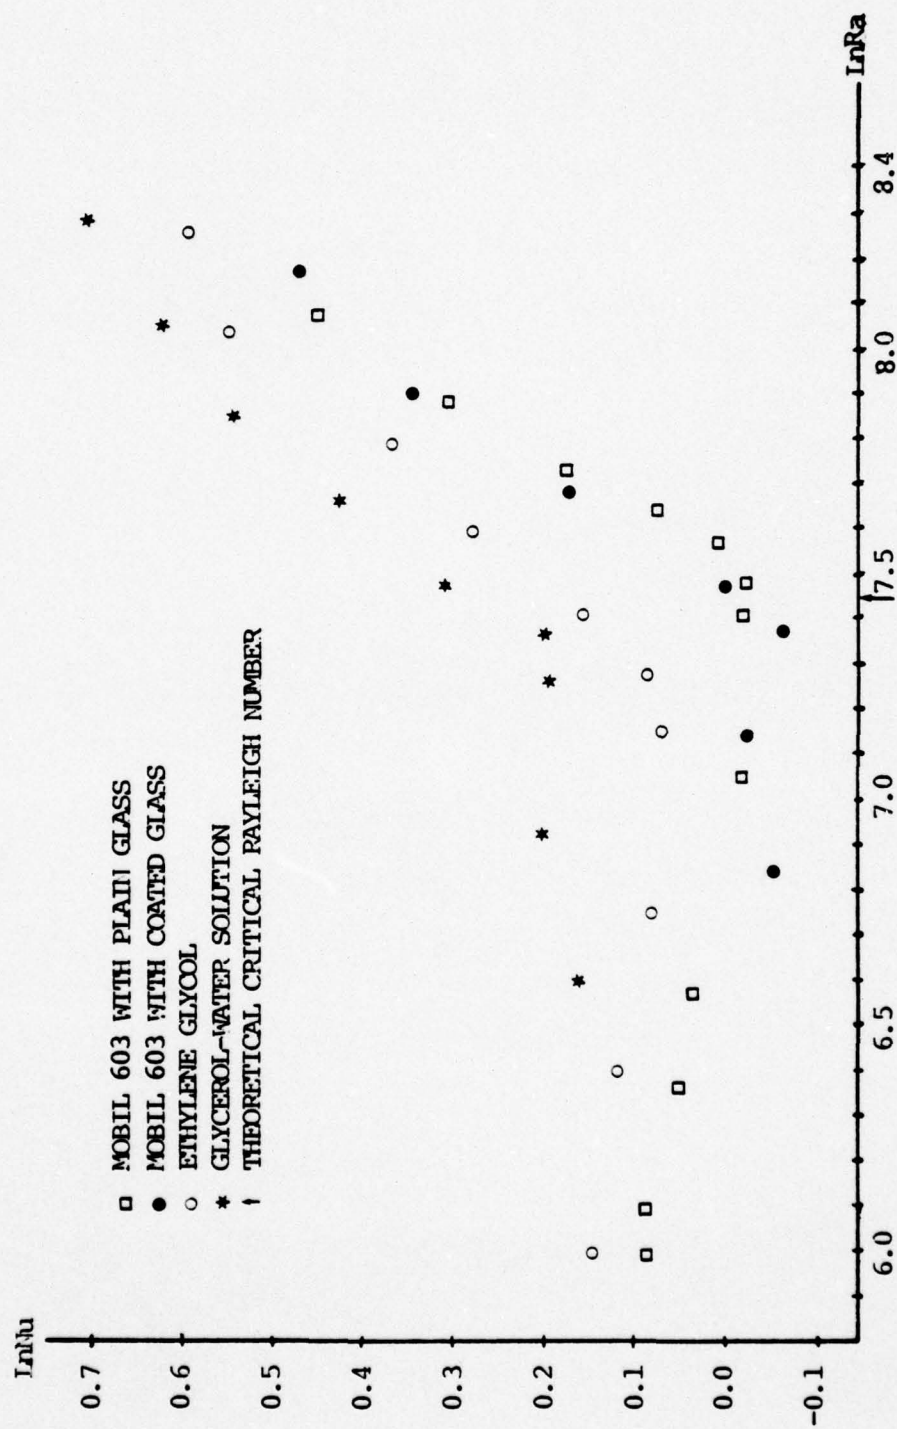| T °F	ΔT °F	Ra	LnRa	Nu	LnNu	Pr
78.3	4.1	736	6.60	1.172	0.159	53.9
81.4	5.4	1017	6.93	1.223	0.202	50.9
84.5	7.1	1430	7.27	1.211	0.192	47.6
84.5	7.8	1589	7.37	1.220	0.199	47.7
86.9	8.3	1770	7.48	1.361	0.308	45.6
90.0	9.5	2133	7.67	1.529	0.425	42.9
92.5	10.8	2558	7.85	1.721	0.543	41.0
96.5	12.5	3154	8.06	1.861	0.621	38.1
102.0	14.2	3951	8.28	2.030	0.708	34.2

FIGURE 13. Plot of LnNu vs. LnRa

Correlations obtained for the data of this study are presented in Table V.

A change in the slope above Ra = 3000 can be observed in Figure 13. The starting point of this change in the slope differed from one fluid to another. In the case of Glycerol-water solution it started well below Ra = 3000. Schmidt and Silveston [Ref. 12] concluded that this is the starting point of another mode of the convection heat transfer regime.

The critical Rayleigh number which is the starting point of the convection heat transfer regime ranged from 1480 to 1702. The critical Rayleigh number was determined by the intersection of the paired lines drawn through the data of conduction and convection regimes for each fluid in Figure 13. These critical Rayleigh numbers and the corresponding Prandtl numbers are presented in Table VI and are plotted as $LnRa_{CR}$ vs $LnPr$ in Figure 14. The critical Rayleigh number is apparently a function of the Prandtl number. The correlation obtained from this data is

$$Ra_{CR} = 1103 \ (Pr)^{0.0760}$$

TABLE V

CORRELATIONS FOR THE CONVECTION HEAT TRANSFER REGIME

Test Liquid	Correlation
Mobil 603	$Nu = 0.0025 \ (Ra)^{0.80}$
Ethylene Glycol	$Nu = 0.0138 \ (Ra)^{0.60}$
Glycerol-Water Solution	$Nu = 0.0115 \ (Ra)^{0.64}$

50

TABLE VI

CRITICAL RAYLEIGH NUMBERS AND CORRESPONDING PRANDTL NUMBERS

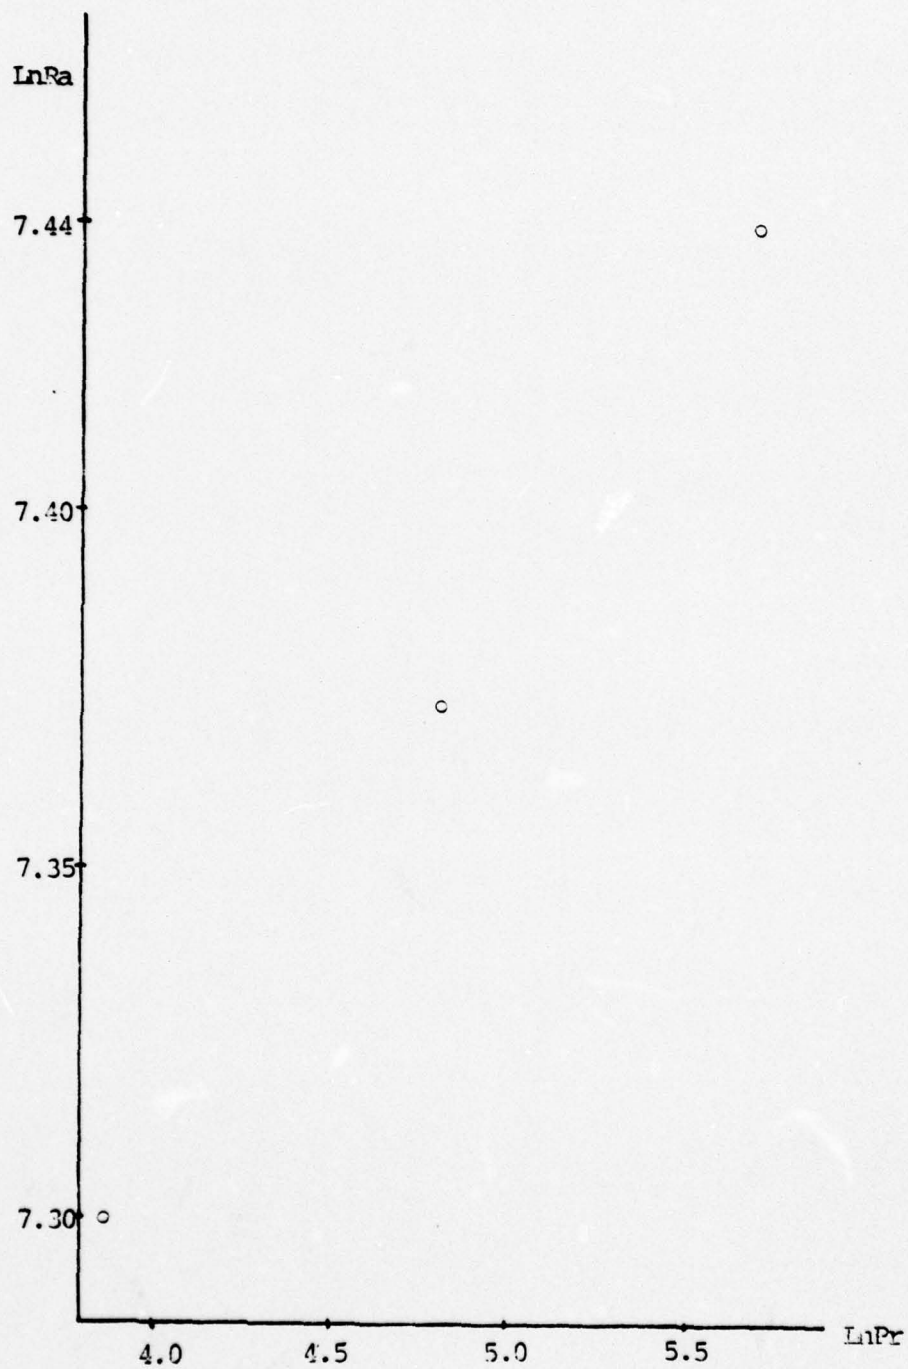| Test Liquid	Type of Glass Plate	Ra_{CR}	$LnRa_{CR}$	Pr	LnPr
Mobil 603	Coated Glass	1702	7.4396	300.0	5.704
Ethylene Glycol	Plain Glass	1480	7.2998	47.74	3.866
Glycerol-Water Solution	Plain Glass	1588	7.3702	123.0	4.812

51

FIGURE 14. Plot of LnRa vs LnPr

V.   RECOMMENDATIONS

The uncertainty in the temperature difference was one
of the biggest among the uncertainties. As the temperature
difference increases the size of this uncertainty decreases.
One could improve the precision of the temperature measure-
ments by employing higher temperature differences.

Another difficulty was attachment of the thermocouples
to the plates of the test section. Even very small thickness
of the flattened bead causes high uncertainty in the measure-
ment of the distance between the two plates of the test
chamber due to the very thin liquid layer thickness.
Intrinsic thermocouples could be an answer to this problem.

The corners of the plexiglass shim were chamfered
to create a gap between the two plates of the test chamber.
The distance between the two plates was determined by an
inside micrometer from these gaps at four corners. In-
creasing number of measurements could decrease the uncertainty
of the Rayleigh number calculations.

A flow visualization technique could be used to demon-
strate visually the establishment of convection in a future
study in this area. Ernst Schmidt and Silveston [Ref. 12]
used a shadowgraph technique and obtained good results.

APPENDIX A

### THERMOCOUPLE CALIBRATION PROCEDURE

The accurate determination of the fluid and test section temperatures was an absolute necessity for this experiment. For this reason, precise calibration of the thermocouples was required.

A Rosemount Calibration System, with a constant temperature oil bath, was used for the calibration. The eighteen thermocouples were suspended several inches into the oil bath. A Platinum Resistance Thermometer in conjunction with a commutation bridge was used as a standard. The calibration was conducted over a range from 70 °F to 150 °F. The maximum uncertainty for the standard thermometer for this temperature range was ± 0.005 °F.

The thermocouple readings during the experiments ranged from 74 °F to 130 °F. The maximum difference between the temperature reading of the standard thermometer and the thermocouples was 0.9 °F for this temperature range. For the same temperature range the maximum difference in temperature readings of the thermocouples was 0.1 °F.

The calibration process was performed with the same switch-box and Numatron used during the experiments. In other words, there was no recording instrument changes once the system was calibrated.

A number was attached to every thermocouple after calibration. Positions of the thermocouples, except the ones used in the cooling water system, are shown in Figure 10. Thermocouples number 8 and 2 were located in the inlet and the exit cooling water manifolds respectively. Thermocouples attached to the inlet and the exit tubes of the cooling water spacer were numbered 19 and 20 respectively.
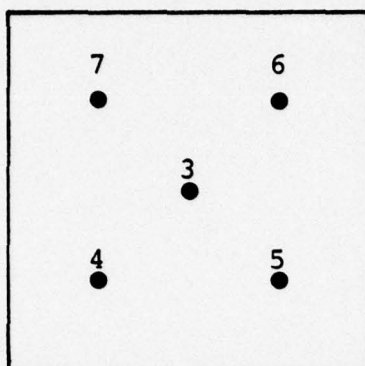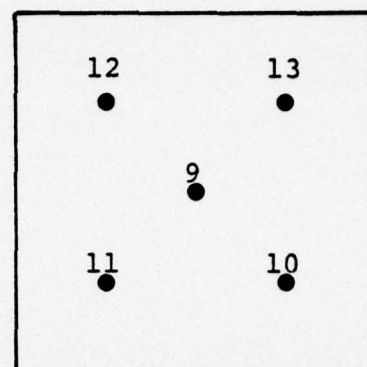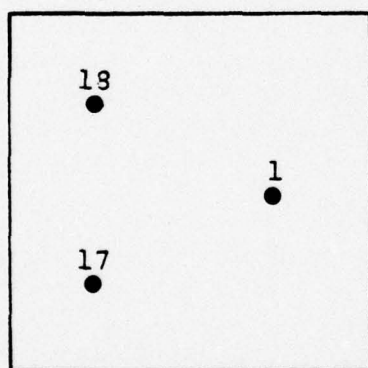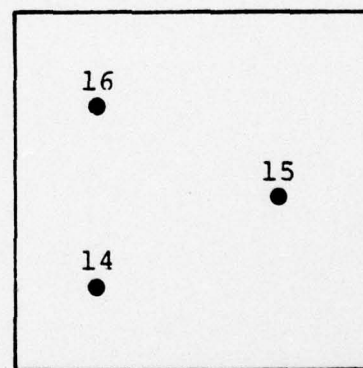
FIGURE 11.   Location of Thermocouples According to
             Their Numbers

APPENDIX B

SAMPLE CALCULATIONS

To represent a sample calculation, the data recorded
on 23 July 1977 is used. The test liquid was glycerol-
water solution. Composition of the solution was 56%
glycerol and 44% distilled water by weight.

Steady state was reached in two hours twenty minutes.
Maximum temperature change in fifty minutes was less than
0.2 °F for the copper and the glass plates of the test
chamber. The temperature change for the cooling water
was less than 0.1 °F for the same period of time.

A sketch of the control volume for the energy balance
on the test chamber indicating the major heat transfer
components involved is shown in Figure 12.

Sample calculations of the supplied power (Q_p), the
heat leakage through the plexiglass shim (Q_L), the heat
loss through the insulation (Q_{INS}), the heat transferred to
the cooling chamber (Q_{CW}), the Rayleigh number (Ra), the
Nusselt number (Nu) and the Prandtl number (Pr) are given
below.

The heat loss through the insulation consisted of the
heat loss through the insulation below the test chamber
(Q_B) and the heat loss through the insulation on the sides
of the test chamber (Q_S). The sum of the heat losses from
the sides for each plate of the test chamber was equal to the
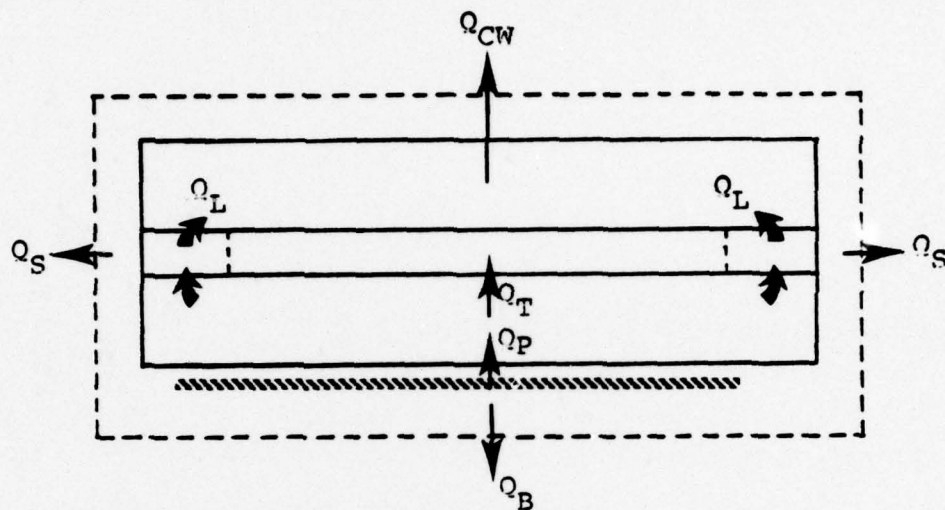heat loss for an equivalent cross sectional area at the film
temperature.

57

FIGURE 12.   Energy Balance in Test Chamber

SAMPLE CALCULATIONS

A. DATA

T_{INS} 1 = 93.9 °F

T_{CW} 2 = 73.1 °F

T_C 3 = 87.9 °F

T_C 4 = 88.1 °F

T_C 5 = 88.1 °F

T_C 6 = 88.3 °F

T_C 7 = 87.9 °F

T_{CW} 8 = 72.8 °F

T_G 9 = 80.6 °F

T_G 10 = 81.1 °F

T_G 11 = 80.9 °F

T_G 12 = 81.3 °F

T_G 13 = 81.3 °F

T_{INS} 14 = 94.1 °F

T_{INS} 15 = 94.3 °F

T_{INS} 16 = 93.8 °F

T_{INS} 17 = 94.4 °F

T_{INS} 18 = 93.7 °F

T_{CW} 19 = 72.8 °F

T_{CW} 20 = 73.1 °F

E_H = 13.98 V

E_R = 2.31 V

E_{GH} = 4.10 V

59

$$R \quad = \quad 2.031 \; \Omega$$

$$F_{CW} \quad = \quad 120.2 \; \text{lbm/Hr}$$

$$T_\infty \quad = \quad 75 \; °F$$

$$k_P \quad = \quad 0.120 \; \text{Btu/Hr/ft/}°F$$

$$A_P \quad = \quad 0.0903 \; \text{ft}^2$$

$$L \quad = \quad 0.01167 \; \text{ft}$$

$$k_{INS} \quad = \quad 0.096 \; \text{Btu/Hr/ft/}°F$$

$$A_B \quad = \quad 0.25 \; \text{ft}^2$$

$$L_B \quad = \quad 0.08333 \; \text{ft}$$

$$L_S \quad = \quad 0.02983 \; \text{ft}$$

$$C_{CW} \quad = \quad 0.998 \; \text{Btu/Lbm/}°F$$

$$\beta \quad = \quad 2.683 \times 10^{-4} \; 1/°F$$

$$\nu \quad = \quad 5.6625 \times 10^{-5} \; \text{ft}^2/\text{sec}$$

$$k_{LIQ} \quad = \quad 0.232 \; \text{Btu/Hr/ft/}°F$$

$$\rho_{LIQ} \quad = \quad 71.02 \; \text{Lbm/ft}^3$$

$$C_{LIQ} \quad = \quad 0.7636 \; \text{Btu/Lbm/}°F$$

$$A_{LIQ} \quad = \quad 0.25 \; \text{ft}^2$$

B. TEMPERATURE CALCULATIONS

1. <u>Average Copper Plate Temperature</u> (T_C)

$$T_C = \frac{T_C 3 + T_C 4 + T_C 5 + T_C 6 + T_C 7}{5}$$

$$= \frac{87.9 + 83.1 + 88.1 + 88.3 + 87.9}{5}$$

$$= 88.1 \pm 0.2 \; °F$$

60

2. **Average Glass Plate Temperature** (T_G)

$$T_G = \frac{T_G\,9 + T_G\,10 + T_G\,11 + T_G\,12 + T_G\,13}{5}$$

$$= \frac{80.6 + 81.1 + 80.9 + 81.3 + 81.3}{5}$$

$$= 81.0 \pm 0.4 \ ^\circ F$$

3. **Temperature Difference Between the Two Plates** (ΔT)

$$\Delta T = T_C - T_G = 88.1 - 81.0 = 7.1 \pm 0.6 \ ^\circ F$$

4. **Film Temperature** (T_F)

$$T_F = \frac{T_C + T_G}{2} = \frac{88.1 + 81.0}{2} = 84.5 \ ^\circ F$$

5. **Temperature Rise in the Cooling Water** (ΔT_{CW})

$$\Delta T_{CW} = T_{CW}\,2 - T_{CW}\,8 = 73.1 - 72.8 = 0.3 \ ^\circ F$$

6. **Temperature Difference in the Insulation** (ΔT_{INS})

$$\Delta T_{INS} = \frac{T_{INS}\,1 + T_{INS}\,17 + T_{INS}\,18}{3} - \frac{T_{INS}\,14 + T_{INS}\,15 + T_{INS}\,16}{3}$$

$$= \frac{93.9 + 94.4 + 93.7}{3} - \frac{94.1 + 94.3 + 93.8}{3}$$

$$= 94.0 - 94.1 = 0.1 \pm 0.3 \ ^\circ F$$

7. **The Difference Between the Room Temperature and The Film Temperature** (ΔT_∞)

$$\Delta T_\infty = T_F - T_\infty = 84.5 - 75.0 = 9.5 \ °F$$

C. POWER CALCULATIONS

1. **Supplied Power** (Q_P)

$$Q_P = \frac{E_R \ E_H}{R} = \frac{(2.31)(13.98)}{2.031}$$

$$= 15.90 \ W = 54.3 \ Btu/hr$$

2. **Heat Leakage Through the Plexiglass Shim** (Q_L)

$$Q_L = \frac{k_P \ A_P \ \Delta T}{L} = \frac{(.120)(0.0903)(7.1)}{0.01167}$$

$$= 6.6 \ Btu/hr$$

3. **Heat Loss Through the Insulation** (Q_{INS})

$$Q_{INS} = Q_B + Q_S$$

$$= \frac{k_{INS} \ A_B \ \Delta T_{INS}}{L_B} + \frac{k_{INS} \ A_S \ \Delta T_\infty}{L_S}$$

$$= \frac{(0.096)(0.25)(0.1)}{0.0833} + \frac{(0.096)(0.1244)(9.5)}{0.02083}$$

$$= 0.03 + 5.5 = 5.53 \ Btu/hr.$$

4. __Heat Transferred to the Test Chamber__ (Q_T)

$$Q_T = Q_P - (Q_{INS} + Q_L)$$

$$= 54.3 - (5.53 + 6.6) = 42.2 \text{ Btu/hr}$$

5. __Heat Transferred to the Cooling Chamber__ (Q_{CW})

$$Q_{CW} = F_{CW} \, C_{CW} \, \Delta T_{CW}$$

$$= (120.2)(0.998)(0.2) = 42.0 \text{ Btu/hr}$$

D. DIMENSIONLESS NUMBERS

1. __Rayleigh Number__ (Ra)

$$Ra = \frac{g \ \beta \ \Delta T \ L^3}{\alpha \ \nu}$$

$$= \frac{(32.174)(2.683 \times 10^{-4})(7.02)(1.167 \times 10^{-2})^3}{\dfrac{0.232}{(71.02)(0.7636)(3600)}} \cdot (5.6625 \times 10^{-5})$$

$$= 1430.2$$

2. __Nusselt Number__ (Nu)

$$Nu = \frac{Q_T \ L}{k_{LIQ} \ \Delta T \ A_{LIQ}}$$

$$= \frac{(42.2494)(1.167 \times 10^{-2})}{(0.232)(7.02)(0.25)} = 1.2106$$

63

3. <u>Prandtl Number</u> (Pr)

$$Pr = \frac{\nu}{\alpha}$$

$$= \frac{\dfrac{(5.6625 \times 10^{-5})(3600)}{0.232}}{(71.02)(0.7636)}$$

$$= 47.6507$$

APPENDIX C

UNCERTAINTY ANALYSIS

The uncertainties for the variables and the dimension-less numbers in this experimental study were calculated by the method proposed by Kline and McClintock [Ref. 18].

The second-power equation of Kline and McClintock was used for the calculation of uncertainties in the values obtained experimentally.

The basis for uncertainties in the temperature readings was the calibration of the thermocouples. For all measured quantities the accuracy of the measuring instrument was the basis for uncertainties. Uncertainties for the properties of the test liquids were given in the references where these properties were obtained.

As an example, the calculation of the uncertainty in the Rayleigh number for the same case taken for sample calculations is given below. The Rayleigh number was defined as:

$$Ra = \frac{g \ \beta \ \Delta T \ L^3}{\nu \ \alpha}$$

and the uncertainty was calculated by the seoncd-power equation of Kline and McClintock as:

$$\frac{dRa}{Ra} = \quad (\frac{d\beta}{\beta})^2 + (\frac{d\Delta T}{\Delta T})^2 + 3(\frac{dL}{L})^2 + (\frac{d\nu}{\nu})^2 + (\frac{d\alpha}{\alpha})^2$$

$$= \quad (0.0121)^2 + (0.085)^2 + 3(0.060)^2 + (0.001)^2 + (0.0102)^2$$

$$= 13.5\%$$

Using the same formula uncertainty in the Nusselt number and the Prandtl number was found to be 16.4% and 1.143% respectively.

The values of the uncertainties for other variables are listed below. Because of the low temperature difference, the uncertainties are higher than average for this case.

Quantity	Uncertainty
$d\rho_{LIQ}/\rho_{LIQ}$	0.0010
$d\nu_{LIQ}/\nu_{LIQ}$	0.0100
dC_{LIQ}/C_{LIQ}	0.010
dk_{LIQ}/k_{LIQ}	0.0010
dk_P/k_P	0.030
dk_{INS}/k_{INS}	0.020

Quantity	Uncertainty
dL/L	0.060
dL_{INS}/L_{INS}	0.050
dE_H/E_H	0.0010
dE_R/E_R	0.0050
dR/R	0.0005
$d\Delta T/\Delta T$	0.0850
$d\beta/\beta$	0.0121
dQ_P/Q_P	0.0051
dQ_L/Q_L	0.110i
dQ_{INS}/Q_{INS}	0.0587
dQ_T/Q_T	0.1255
$d\alpha/\alpha$	0.0102

Quantity	Uncertainty
dA_{LIQ}/A_{LIQ}	0.020
dA_B/A_B	0.020
dA_S/A_S	0.020
dA_P/A_P	0.020
dL_B/L_B	0.050

LIST OF REFERENCES

1. Lord Rayleigh, _Phil. Mag._, Series 6, Vol. 32, 529-546 (1916).

2. Benard, _Rev. Gen. Sci.,_ 11, 1261-1271, 1309-1328 (1900).

3. Jeffreys, H., _Phil. Mag._, Vol 2, 883-844 (1926).

4. Jeffreys, H., _Proc. Roy. Soc._ (London). A 118, 195 (1928).

5. Low, A. R., _Proc. Roy. Soc._ (London), A 125, (1929).

6. Sutton, O. G., _Proc. Roy. Soc._ (London), A 225, 185 (1954).

7. Malkus, W. V. R., _Proc. Roy. Soc._ (London), A 225, 185 (1954).

8. Cotton, I., _Physics of Fluids_, Vol. 9, No. 12, 2521-2522 (1966).

9. Schmidt, R. J., and S. W. Milverton, _Proc. Roy. Soc._ (London), A 152, 586 (1935).

10. Chandra, K., _Proc. Roy. Soc._ (London), A 164, 231 (1938).

11. DeFraaf, J. G. A., and E. F. M. Van Der Held, _Appl. Sci. Res._, A3, 393 (1952).

12. Schmidt, E. and P. L. Silveston, _Chem. Eng. Progr. Symposium Ser._, No. 29, 55, 163 (1959).

13. Mull, W., and H. Reiher, Beih. Z. Gesundheitstech. Ing., Series 1, 28 (1930).

14. Mobil Technical Service Division, _Mobil Technical Bulletin: Heating with Mobiltherm_, 11-14 (1971).

15. Geiringer, P. L., _Handbook of Heat Transfer Media_, 142-149, Reinhold Publishing Corporation (1962).

16. Tovloukian, Y. S., and others, _Thermophysical Properties of Matter_, V. 3 and V. 6, IFI/Plenum (1970).

17. Miner, C. S., and Dalton, N. N., _Glycerol_, Reinhold Publishing Corporation (1953).

18. Kline, S. J., and McClintock, _Mechanical Engineering_, V. 75, 3-8 (1953).

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Defense Documentation Center Cameron Station Alexandria, Virginia 22314	2
2.	Library, Code 0142 Naval Postgraduate School Monterey, California 93940	2
3.	Associate Professor M. Kelleher, Code 69Kk Department of Mechanical Engineering Naval Postgraduate School Monterey, California 93940	2
4.	Dz. Yzb. Mahmut Yurteri Kiziltoprak Sari Lale Sokak 2/3 Kadikoy - Istanbul TURKEY	3
5.	Department of Mechanical Engineering Naval Postgraduate School Monterey, California 93940	1